

ECONOMY FULLY AUTOMATIC L-BAR SEALER & SHRINK TUNNEL SET

Model: SS-5600E/1808-28

Entry level Fully Automatic



Our newest SS-5600E/1808-28 is a fully automatic L-Bar Sealer and Shrink Tunnel that is sold as a set or individually. This economical, entry level, fully automatic system is great for customers who have one or two semi automatic L-Bar sealers now and need more speed or want to automate without spending a lot of money.

With the high cost of labor, this fully automatic system can reduce labor costs, maximize productivity and increase efficiency.

Standard Features of L-Bar Sealer:

- Speeds up to 20-25 PPM
- Fast product changeovers
- PTFE coated hot knife seal blade
- Fixed conveyor speed at 70 FPM
- Pin wheel hole punch
- Dual emergency stop switch
- Self contained scrap removal system with built-in alarm when full
- Recommended film: POF (PVC not recommended)

Standard Features of Shrink Tunnel:


- Fully re-circulating air chamber
- Live or dead roller rod conveyor
- Digital temperature control
- Adjustable air velocity control
- State of the art AC variable speed drive
- Chromed conveyor rollers and shafts (no rust)
- Automatic tunnel cool down with shut off
- Sealed bearings on drive and idler shafts
- Chamber size: 18"W x 8"H x 28"L
- Quietest tunnel on the market
- Heats up to 300°F in less than 10 minutes
- Thermal overload protection on all motors
- Anti-jam safety feature on conveyor
- Easily adjustable crank handle allows for tunnel height adjustment

Specifications:

POWER	220V, 1 PHASE, 10 AMP
SEAL DIMENSIONS	22"L X 18"W X 6"H
MACHINE SPEED	20-25 PPM
AIR	3CFM @ 80 PSI
MINIMUM PACKAGE SIZE	4"L X 2.5"W X 1/8"H
MAXIMUM PACKAGE SIZE	20"L X 17"W X 7"H
MAXIMUM FILM WIDTH	23"
TUNNEL CHAMBER DIMENSIONS	28"L X 18"W X 8"H
WEIGHT	TUNNEL: 450-LBS / L-BAR SEALER: 900-LBS

ECONOMY FULLY AUTOMATIC L-BAR SEALER & SHRINK TUNNEL SET

Model: SS-5600E/1808-28



PTFE Coated Seal Blade

Scissor action seal head with PTFE coated seal blades will seal all commercially available polyolefin or polyethylene films.



Pinwheel Hole Punch

Fully adjustable and removable pins set against brush roller so they never wear out





Adjustable Inverting Triangle

Crank handle for package height adjustment. Adjustable air flow to balloon bag makes for better appearance.

Scrap Wind Up

Includes wind up scrap removal system with built-in alarm which signals when full

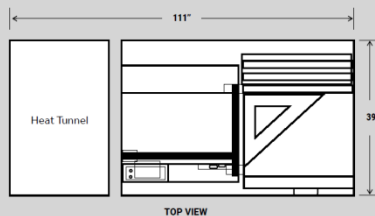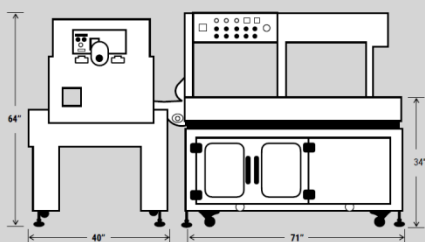

8820 Baird Avenue • Northridge, CA 91324 • T: 818-718-8818 • F: 818-718-8857

contact@sealersales.com

www.sealersales.com